







红外滤光片产品




产品参数

序号	型号	中心波长 nm	半峰宽 nm	透射率	截止区(除通带) nm	基底材料	厚度 mm	外观尺寸 mm	有效孔径 mm	镀膜方式	应用
1	3400NBP-180	3400±50	180±20	Tmax≥85%	1500~11000	CZ-Si	0.5±0.05	Φ100±0.2	Φ98±1	热蒸发及光控	CH4
2	3900NBP-138	3900±50	138±15								Reference
3	3900NBP-90	3900±50	90±15								Reference
4	4260NBP-180	4260±40	180±20								CO2
5	4480BPF-620	4480±70	620±60								Flame
6	5020NBP-240	5020±40	240±20								Flame
7	3090NBP-135	3090±50	135±20	Tmax≥80	1500-11000						C2H2
8	10600NBP-240	10600±100	240±50	Tmax≥70%	2000~18000						SF6
9	10600NBP-300	10600±100	300±50	Tmax≥70%	2000~18000						SF6
10	9440NBP-460	9440±90	460±40	Tmax≥70%	2000~18000						R32
11	10270NBP-220	10270±100	220±20	Tmax≥70%	2000~18000						R134a
12	5500LPF-14000	5500±100	长波通	Tave≥75%	400-5000						Body Temperature

典型光谱2-1

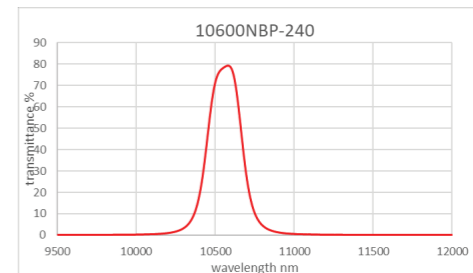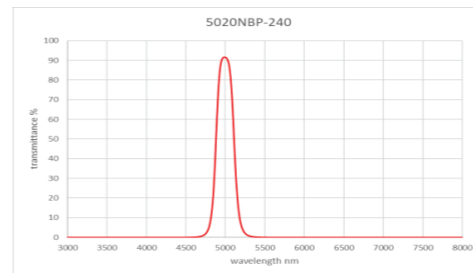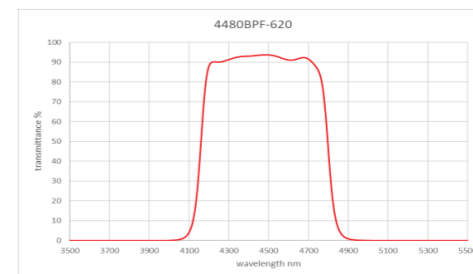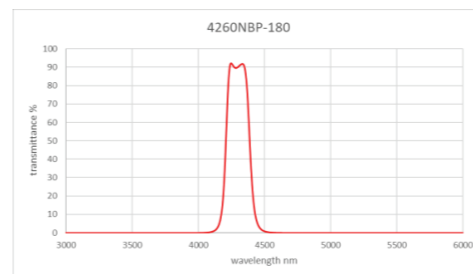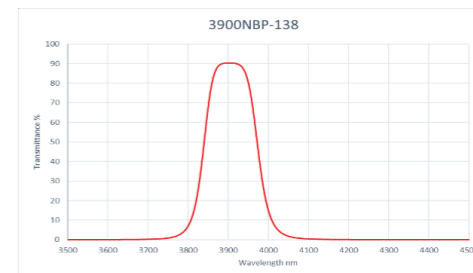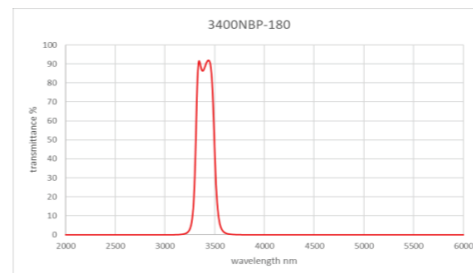

典型光谱2-2

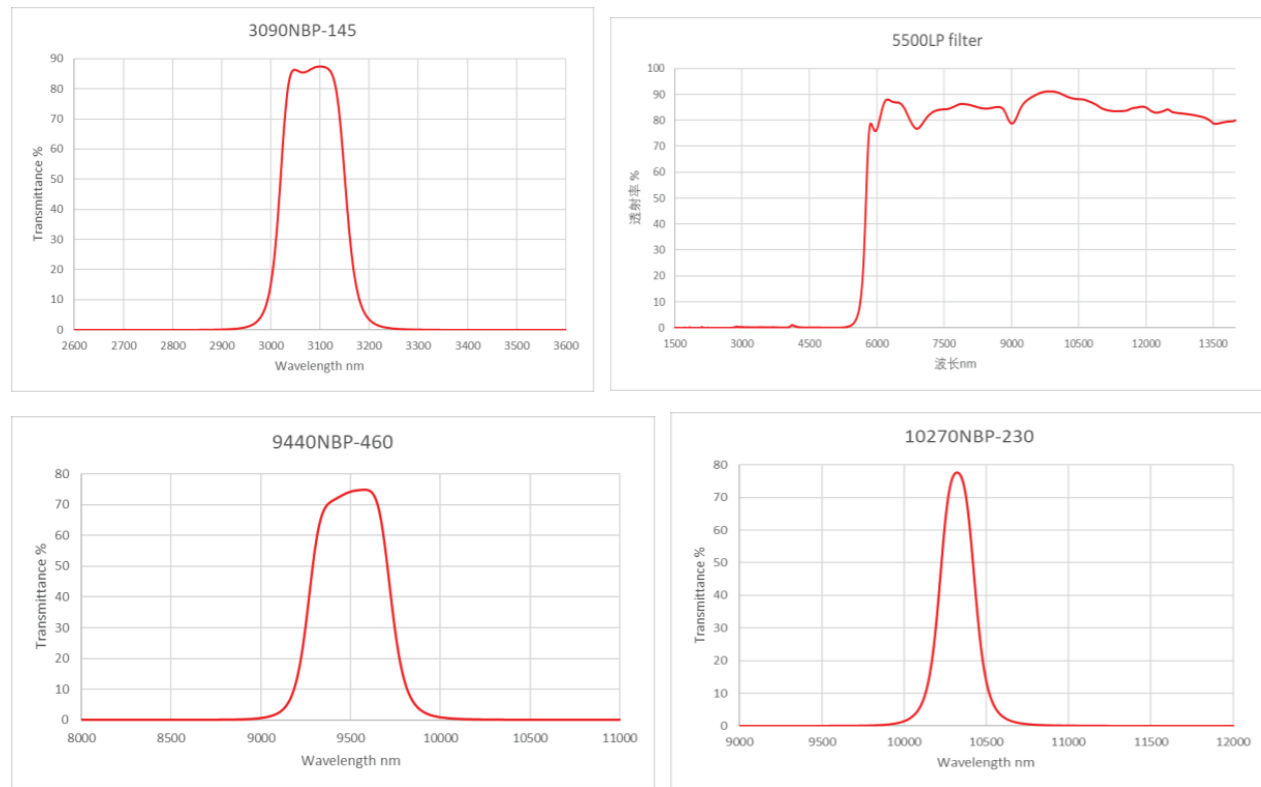

产品实物拍摄

